Yealink UH34 Datasheet

Yealink USB Wired Headset

UH34: Leather ear cushions UH34 Lite: Foamy ear cushions

The Yealink UH34/UH34 Lite, available in monaural (UH34/UH34 Lite Mono) and binaural (UH34/UH34 Lite Dual), is a professional USB wired headset with crystal clear audio. The UH34/UH34 Lite offers a lightweight, comfortable form to wear, even for an entire workday. It's suitable for workers who spend a lot of time wearing headsets for voice communications. Provided with Yealink USB Connect software and Yealink Device Management Platform/Cloud Service, you can easily check the device information and upgrade the firmware of one or multiple UH34/UH34 Lite headsets.

UH34 Lite Mono
UH34 Lite Dual

UH34 Mono
UH34 Dual

Scenarios

Suitable for daily office use and a call center.

Key Features

Simple and Flexible Connectivity

Runs right out of the box, and a USB plug-and-play setup makes the connection to the PC. You can enjoy a reliable call experience with soft clients. A perfect match with Yealink IP phones gives you optimized audio quality.

Ultra-lightweight, All-Day Wearing Comfort

Built for comfort with soft ear cushions and ultra-lightweight materials, the UH34/UH34 Lite is 10%~30%* lighter than other conference headsets in the same range. Its ergonomic design makes this headset comfortable for all-day conference calls and all-day use. (* Test data provided by Yealink Lab)

Unparalleled Audio Experience

Made for calls and music, UH34/UH34 Lite is kitted out with a high signal-to-noise ratio speaker and independent cavity design. The passive noise cancellation creates richer and clearer conversations with reduced background noise.

Intuitive Controller

The hand-held controller with LED indicator provides easier access to key call control capabilities, including answer call, end call, reject a call, and mute/unmute.

Specifications

Specifications	Introduction
Main Features	• Plug-and-play - USB connectivity to Yealink IP phones, including T41S/T42S/T46S/T48S/T42U/T43U/T46U/T48U/T53/T53W/T54W/T57W/T58A/VP59 (T41S/T42S/T46S/T48S should be upgraded to version 82 or higher) • HD Voice/Wideband speaker performance • Noise-canceling microphone and passive noise cancellation • ActiveProtection technology safeguards users from acoustic injury • Integrated LED indicator and warning tone • 320° bendable boom arm for easy adjustment without breaking • Optional connections for UH34: USB-C, 3.5mm jack • Compatible with Linux
General	• Headset cable length: 1.2 m (from headset to call control unit) • USB cable length: 0.9 m (from call control unit to USB plug) • Supported operating systems: Microsoft Windows® 8/8.1/10/11, Apple Mac OS, Linux • Color: Black • Weight: UH34 Mono: 88 g / UH34 Dual: 118 g /UH34 Lite Mono: 84 g / UH34 Lite Dual: 110 g • Storage temperature: -30 °C to +70 °C • Operating temperature: -10 °C to +50 °C
Microphone	• Microphone type: Uni-Directional ECM

	• Microphone frequency response range: 100 Hz-10 kHz • Microphone bandwidth: Wideband • Microphone sensitivity: -40 dB re. 1 V/Pa
Speaker	• Speaker size: 28 mm • Speaker sensitivity: 92.5 ± 3 dB SPL @1 kHz • Speaker frequency response range: 20 Hz-20 kHz • Speaker impedance: 32Ω, @1.0 kHz • Speaker input power: 30 mW of potency • Speaker bandwidth: Wideband
Audio Performance	• Wideband audio: up to 15kHz (stereo)
Hearing Protection	• Peak Block Protection (EN50332) • Australian G616 Protection (AU G616) • Daily Noise Exposure Protection
Easy Call Management	• Answer/End/Reject/Hold a call • Volume up/down • Microphone mute • Redial last outgoing call
Package Features	• Package contents: - UH34 Mono Headset or UH34 Dual Headset or UH34 Lite Mono Headset or UH34 Lite Dual Headset (UH34 with leather ear cushions/UH34 Lite with foamy ear cushions) - Quick Start Guide • Qty/CTN: 20 PCS • N.W/CTN: UH34 Mono: 2.870 kg / UH34 Dual: 3.486 kg / UH34 Lite Mono: 2.790 kg / UH34 Lite Dual: 3.326 kg • G.W/CTN: UH34 Mono: 3.576 kg / UH34 Dual: 4.202 kg / UH34 Lite Mono: 3.496 kg / UH34 Lite Dual: 4.042 kg • Giftbox size: 170 mm x 195 mm x 63 mm • Carton Meas: 345 mm x 325 mm x 400 mm

Connection

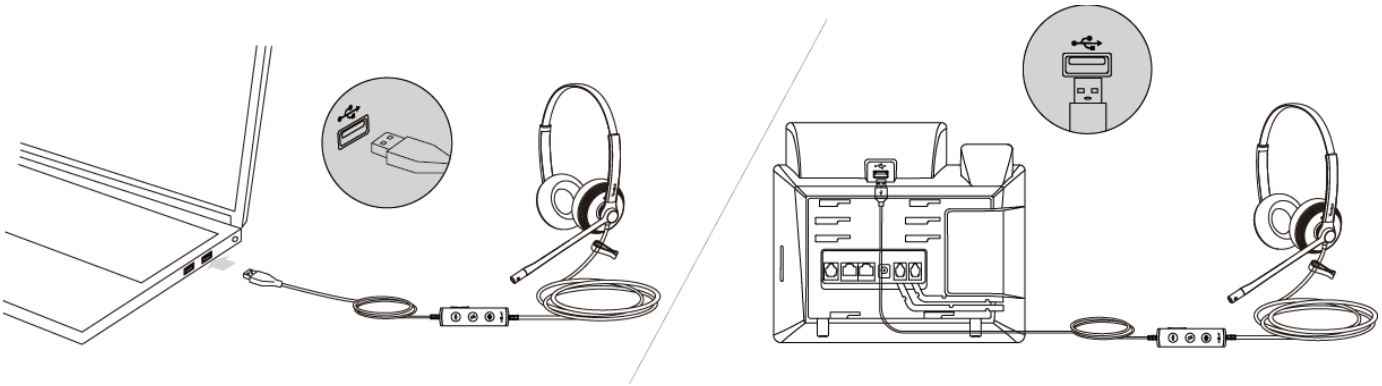

For more information, please go to the Yealink official website.